

SPECIFICATIONS



Physical - Instrument Only

Height: 4.7 inches (120 mm)
Width: 9.5 inches (240 mm)
Depth: 2.4 inches (60 mm)
Weight: 2.75 pounds (1.2 kg)

Physical - Instrument with Nylon Carrying Case

Height: 6 inches (152 mm)
Width: 11 inches (280 mm)
Depth: 4.5 inches (115 mm)
Weight: 4.75 pounds (2.15 kg)

Environmental:

Operating Temperature: 0° C to 50° C (32° F to 122° F)
Storage Temperature: -20° C to 60° C (-4° F to 140° F)
Humidity: 95% maximum relative, non-condensing

Power:

Battery: Internal, rechargeable, 7.2 V Nickel metal hydride
Charging Source: External 12 VAC transformer, 1.3 A
Operating Time: Greater than 10 hours, continuous, without backlight

Display:

320 x 240 dot-matrix liquid crystal display with electroluminescent backlighting

Horizontal Resolution: 1 foot (0.1 m) at any VOP

Vertical Resolution: 14 bits with 203 dots displayed

Vertical Sensitivity: Greater than 56 dB

Output Signal: Pulse widths of 5, 25, 100, 500 nsec

Distance Accuracy:

+/- 0.5 ft (0.15 m) plus +/- 0.01% of reading

Maximum Ranges:

63,700 ft (19.4 km) at 99% VOP
51,500 ft (15.7 km) at 80% VOP
Range varies with VOP. Maximum testable cable lengths varies with pulse width and cable type.

Input Protection:

400 V (AC+DC) from DC to 400 Hz, decreasing to 10 V at 1 MHz

Velocity of Propagation:

Two user-selectable display formats
VOP (%) with 2 digit precision ranging from 30% to 99%
V/2 with 3 digit precision ranging from 45 to 148 in meters mode or from 148 to 487 in feet mode

Waveform Storage: 6144 samples per waveform

Standard: 4 SUPER-STORE waveforms
Optional: 16 SUPER-STORE waveforms

Noise Filters:

Standard: 8x, 50/60 Hz, Auto
Optional: 4x, 16x, 32x, 64x, 128x Averaging

Standard Accessories:

Operator's manual, 12 VAC charger, Black nylon carrying case, probes, connectors

Optional Accessories:

Extended waveform memory storage, Additional noise filters, Extended warranty

Technological advances allow changes in specifications and/or components. Changes may be made without notification.

Y2K
COMPLIANT

CE
CERTIFIED

Radiodetection Ltd.
Western Drive, Bristol, BS14 0AF United Kingdom
Tel: +44 (0) 117 976 7776 Fax: +44 (0) 117 976 7775 E-mail: rd.sales.uk@spx.com

Radiodetection
154 Portland Road, Bridgton, ME 04009 USA
Tel: (207) 647 9495 Toll Free: (877) 247 3797 Fax: (207) 647 9496
E-mail: rd.sales.us@spx.com



Model 3200

Metallic Time Domain Reflectometer

Cable Fault Locator

Designed for the CATV installer / technician.



ACCURATE TO A FAULT


Model 3200 TDR, Cable Fault Locator, is one of the fastest, most accurate test methods for locating problems on metallic cable. The instrument's easy operation and field durability make the Model 3200 a valuable troubleshooting tool.

THE INSTRUMENT


Model 3200 is a handheld, metallic TDR designed specifically for fault locating on coaxial cable, or any two conductor metallic cable.

Designed for easy operation and engineered for accuracy, Model 3200 will quickly and easily locate and identify opens, shorts, splices, tap, splitters, and other cabling faults and conditions. Verify the lengths of new reels of cable and measure partial reels for cable inventory.

The Model 3200 is housed in a high impact ABS plastic case and further protected by a nylon carrying bag, which provides storage for connectors and Operator's manual. The high resolution Liquid Crystal Display shows the live waveform of the cable under test, plus useful data such as distance to the fault, pulse width, and battery charge level. The built-in backlight is ideal when testing in a low light environment.

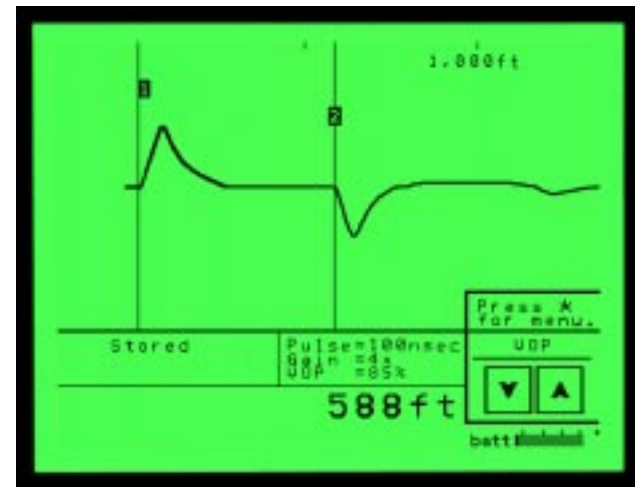

Selected functions and operations are controlled by the keypad, such as waveform position, horizontal zoom, vertical gain, cursors, range, contrast, and backlight. A popup menu is easily accessible for additional functions. Riser-Bond Instruments' unique popup menu system allows the operator to quickly select and use a function while the waveform is active.

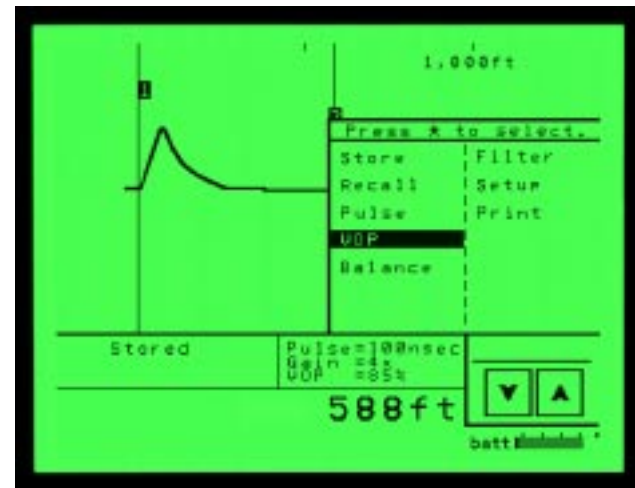

The high energy, rechargeable batteries keep the instrument instantly ready for service calls.

The small size and lightweight packaging is convenient for all aerial and underground applications. The rugged, splashproof casing is ideal for outside environments.

The low price of the Model 3200 allows an instrument for every technician. More instruments in the field means faster repair and return to service, reduced customer repeats, improved customer relations, and increased revenue!

FEATURES & BENEFITS

Exclusive features, such as RANGE-PLUS, Noise Filters, SUPER-STORE, and Intermittent Fault Detection (IFD) provide the Model 3200 with superior functions and test capabilities.

RANGE-PLUS steps through preset ranges to quickly scan the cable for faults. Each range consists of a specific pulse width, vertical gain, and distance of cable.

Eliminate unwanted waveform noise with multi-level software filtering.

Use the exclusive SUPER-STORE waveform data storage to store both on-screen and off-screen cable waveform information. Move the cursors, change the VOP, and increase or decrease the vertical gain and horizontal zoom settings, *even on stored waveforms!*

Monitor and locate hard-to-find intermittent faults using the Intermittent Fault Detection (IFD) mode. Manual operation is always available to move the waveform position, change the VOP, and adjust the gain and zoom settings, without having to restart the IFD test.



World leaders



Radiodetection is a proud member of the SPX group of companies, which provide technical products and service solutions worldwide.

Radiodetection and its associated companies specialize in the design and manufacture of products for the location and maintenance of underground pipes and cables. Our aim is to be viewed as the supplier of choice of 'high performance' quality equipment using advanced product technologies. We are also committed to both design innovation and customer support.

Technical support



Radiodetection equipment users have easy access to technical support. A call to your regional representative, or the Radiodetection head office, will put you in contact with our team of field-experienced technical experts.

Servicing and repair



Radiodetection has a team of factory-trained service technicians and dedicated service facilities. Turnaround is fast, and costs are very competitive.

Training



Product training for your operators and training personnel is available on your site, or at Radiodetection's headquarters. Training is with qualified instructors and each trainee receives a certificate to confirm they have received the training.

America

Radiodetection

154 Portland Road
Bridgton, ME 04009, USA
Tel: +1 (207) 647 9495
Toll Free: +1 (877) 247 3797
Fax: +1 (207) 647 9496
Email: rd.sales.us@spx.com
Web: www.radiodetection.com

Pearpoint

72055 Corporate Way
Thousand Palms CA 92276, USA
Tel: +1 800 688 8094
Tel: +1 760 343 7350
Fax: +1 760 343 7351
Email: pearpoint.sales.us@spx.com
Web: www.radiodetection.com

Radiodetection (Canada)

344 Edgeley Boulevard, Unit 34
Concord, Ontario L4K 4B7, Canada
Tel: +1 (905) 660 9995
Toll Free: +1 (800) 665 7953
Fax: +1 (905) 660 9579
Email: rd.sales.ca@spx.com
Web: www.radiodetection.com

Europe

Radiodetection Ltd (UK)

Western Drive
Bristol BS14 0AF, UK
Tel: +44 (0) 117 976 7776
Fax: +44 (0) 117 976 7775
Email: rd.sales.uk@spx.com
Web: www.radiodetection.com

Radiodetection (France)

13 Grande Rue, 76220
Neuf Marché, France
Tel: +33 (0) 232 8993 60
Fax: +33 (0) 235 9095 58
Email: rd.sales.fr@spx.com
Web: http://fr.radiodetection.com

Radiodetection (Benelux)

Industriestraat 11
7041 GD 's-Heerenberg, Netherlands
Tel: +31 (0) 314 66 47 00
Fax: +31 (0) 314 66 41 30
Email: rd.sales.nl@spx.com
Web: http://nl.radiodetection.com

Radiodetection (Germany)

Groendahlscher Weg 118
46446 Emmerich am Rhein, Germany
Tel: +49 (0) 28 51 92 37 20
Fax: +49 (0) 28 51 92 37 520
Email: rd.sales.de@spx.com
Web: http://de.radiodetection.com

Asia-Pacific

Radiodetection (Asia-Pacific)

Room 708, CC Wu Building
302-308 Hennessy Road, Wan Chai
Hong Kong SAR, China
Tel: +852 2110 8160
Fax: +852 2110 9681
Email: rd.sales.cn@spx.com
Web: www.radiodetection.com

Radiodetection (China)

Hongfu Mansion, Room 61622
Zheng Ge Zhuang, Bei Qi Jia Town
Chang Ping District
Beijing 102209, China
Tel: +86 (0) 10 8975 5540
Fax: +86 (0) 10 8975 5640
Email: rd.service.cn@spx.com
Web: http://cn.radiodetection.com

Radiodetection (Australia)

Unit 14, 5-7 Prosperity Parade
Warriewood NSW 2102, Australia
Tel: +61 (0) 2 9979 8555
Fax: +61 (0) 2 9979 7733
Email: rd.sales.au@spx.com
Web: www.radiodetection.com

To see the full range of products and services provided by Radiodetection visit:

www.radiodetection.com

Radiodetection products are under continuous development and are subject to change, we reserve the right to alter or amend any published specification without notice.

Copyright 2008 Radiodetection Ltd. - SPX Corporation. All rights reserved. Radiodetection Ltd. is a subsidiary of SPX Corporation.



Radiodetection
AN SPX COMPANY